




HD2 Production/Uplink

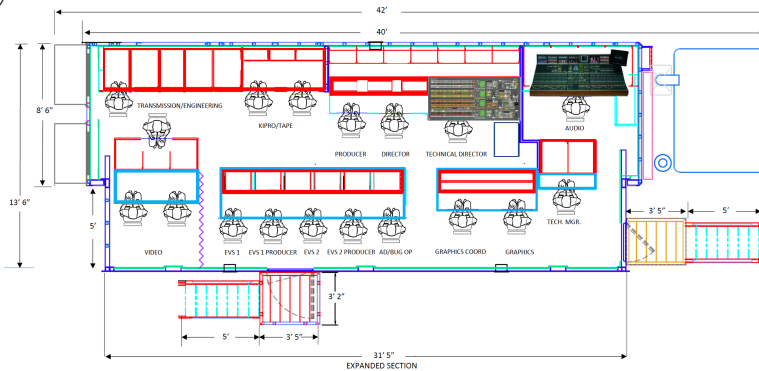

Cameras:

- 6 Sony HDC-1500 Multi-Format Cameras
- 5 Sony HDVF-C750W 6" Color HD VFs
- 4 HDFX-100 Fiber to Triax Adapters
- 4 HDTX-100 Triax to Fiber Adapters
- 1 Sony EX3 POV Camera

Note: wired for up to 8 CCUs

Lenses:

- 1 Fujinon XA 88 x 8.8
- 2 Fujinon XA 66 x 9.3
- 2 Fujinon HA 22 x 7.8
- 1 Fujinon HA 18 x 7.6

**Note: additional lenses available upon request*

Camera Supports:

- 3 Vinten Vector 70/700 Tripods
- 4 Sachtler 20 Tripods

Production:

- 1 Grass Valley Kalypso HD 4 ME Switcher:
 - 60 Inputs, 4 Keyers per ME
 - 48 Outputs, Still Store Animation
 - DBL Take, 6 Transform Engines
- 1 Leitch Centrio 96 Input Multi-Viewer
- 24 Unit LCD Monitor Wall w/IMD
- 1 Image Video TSI-1000 Tally System w/ UMDs
- 1 Leitch Platinum 256 x 256 Router:
 - 112x136 Digital HD/SD Matrix
 - 8x8 Analog Matrix
 - 24 Router Control Panels (RCP's)
- 14 Leitch X50 Frame Synchronizer/Converter
- 2 AJA FS-1 Frame Synchronizer/Converter
- 6 Leitch NEO Up, Down, Cross Converters
- 14 Leitch FR-6802+ Frames:
 - Conversion, Distribution and Fiber I/O
- 3 Videotek TVM-900 HD/SDI Scopes
- 2 Evertz MSc 5600 Test Generators
- 2 Videotek VTM On-Screen Monitor w/Remote

Graphics:

- 1 Chyron HyperX3 HD/SD Character Generator
- 2 Channel System w/ EFX
- eFX Clip, Lyric PRO & Lyric

Recording & Playback:

- 2- EVS XT[2] 6 Ch. HD Record/Playout Systems
- 1- EVS X-File[3]
 - 2 Removable 2TB SATA HDD, eSATA & USB3
 - 10Gigabit Ethernet ports (SFP+ connectors) Multimode Fiber
- 6- AJA KiPro Disk Recorders
- 2- Sony HDW M-2000 HDCam VTRs
- 1- Panasonic AJ-HD1400 Compact DVCPRO VTR
- 1- Fast Forward Dual SDI DDR
- 1- DVD Recorder

Note: additional KiPro Recorders available

Audio:

- 1- Calrec Omega Bluefin Digital Console:
 - MADI w/ST Fiber Connection (Single port total
 - OTR 1210 (Single Mode MADI Coax to MADI Fiber Transceiver
 - 64 audio channels bi-directionally on each port
 - 64 AES In/Out 64 Mic/Line Input
 - 52 Dual Layer Faders 32 Line Output
 - 1- JOECO BlackBox BBR64 MADI Recorder
 - 64 Channel record or playback at 44.1kHz and 48kHz
 - Records standard broadcast WAV files to external USB2 drive
 - Compatible with both MAC & PC drives formatted at FAT32
 - * NOTE: External drive must be USB2, up to 2TB, 7200rpm*
 - 2- Digicart II w/ Remote
 - 1- HHB CD/RW with Word Clock
 - 1- DK Digital Audio Scope (5.1 Surround)
 - 20- Wohler Audio Monitors
 - 5- Sennheiser HMD-25 Sportscaster Headsets
 - 3- Studio Technologies Model 210 Talkback
 - 3- Daltech Announcer Talkback Boxes
 - 1- Leitch Integrator 64 x 64 Stereo Audio
 - 1- Leitch Integrator 96 x 96 Coax AES
 - Genelec 5.1 Monitor System w/ Sub-woofer
 - 1- Dolby DP571 E Encoder
 - 1- Dolby DP572 E Decoder
 - 8- Audio-Technica AT8035B Shot Gun Mics
 - 4- Sony ECM-77B Lavaliers
 - 5- Electro Voice RE-50 Hand Mics
- *Big Ears Parabolic Reflectors available upon request*

Communications:

- 1- RTS Cronus Digital Matrix Intercom 96x96
- 1- RTS SAP 1626 - 12 Intercom Channels
- 8- IFB Channels (Wet/Dry)
- 4- TIF Telco Interface
- 10- RTS KP 632 Key Panels
- 8- RTS KP 12 Key Panels
- 1- RTS KP98-7 Keypanel

Outboard Monitors:

- 1- Dell 20" HDMI/DVI LCD Monitor
- 1- JVC 20" LCD HD/SD/Analog Monitor
- 6- Coby 15" LCD Analog Monitors w/HDMI Converters
- 2- Sony 9" LCD HD/SD/Analog Monitor
- 1-TV Logic 17" LCD LD Monitor w/Router

Transmission:

- Sat-Lite "Peloris" 1.8 Meter Ku Antenna
 - Integrated "Saddle Bag" Amplifier Platform
 - 4 Port Non-Restricted Feed
 - 360 Degree Rotating Antenna Mount
 - 2- MCL MT-3400 400W TWTA Amplifiers
 - 2- Adtech EN81 HD Encoders, MPEG2/MPEG4
 - 2- Adtech RD-60 HD Receiver - MPEG2/MPEG4
 - 2- Miteq Ku Band Upconverters
 - 1- Avcom Digital Spectrum Monitor
- **Note wired for 4 encoders*

Truck Physical Specs:

- 2000 Freightliner Argosy 2000 Chassis
- Seating for 16 Crew
- Weight: 54,000lbs (GVW)
- Length: 40'
- Height: 13' 6"
- Width: 8' 6" Not Expanded
- Expandable Section: 31' x 5'
- HD2: NY Plate No. 44409-MN

HD-2 B-Unit Support Truck

- 2009 Freightliner M2
- Weight: 33,000lbs (GVW)
- Length: 31', Height: 12'8", Width: 8'2"
- *Length w/Lift Gate Extended: 37'
- Cantilever Lift Gate
- Depth: 6', Width: 8'2"
- 208v, 60a Single Phase Shore Power
- *NOTE: B Unit powered by A Unit, up to 100ft away.*
- HD2-B Unit: NY Plate No. 46539KA

HD-2 Power Requirements:

- 2x 240v, 200a Single Phase or
- 1x 208v, 200a Three Phase
- Carries 200' Camlock Cable w/ Pigtails